

ISBN 978-0-626-20200-2

SANS 300103:1990

Edition 1 and nat. amdt 1

ETS 300103:1990

Edition 1

Any reference to SABS ETS 300103 is deemed
to be a reference to this standard
(Government Notice No. 1373 of 8 November 2002)

SOUTH AFRICAN NATIONAL STANDARD

Integrated Services Digital Network (ISDN); Support of CCITT Recommendation X.21, X.21 bis and X.20 bis based Data Terminal Equipments (DTEs) by an ISDN; Synchronous and asynchronous terminal adaption functions

This national standard is the identical implementation of ETS 300103:1990 and is adopted with the permission of the European Telecommunications Standards Institute.

Published by Standards South Africa
1 dr Iategan road Groenkloof ☒ private bag x191 Pretoria 0001
tel: 012 428 7911 fax: 012 344 1568 international code + 27 12
www.stansa.co.za
© Standards South Africa

standards
SouthAfrica
(a division of SABS)

SANS 300103:1990

Edition 1 and nat. amdt 1

ETS 300103:1990

Edition 1

Table of changes


Change No.	Date	Scope
Nat. amdt 1	2007	Amended to change the designation from SABS to SANS, with no technical changes.

National foreword

This South African standard was approved by National Committee StanSA TC 74, *Communication technology*, in accordance with procedures of Standards South Africa, in compliance with annex 3 of the WTO/TBT agreement.

This SANS document was published in July 2007.

This SANS document supersedes SABS ETS 300103:1990 (first edition).

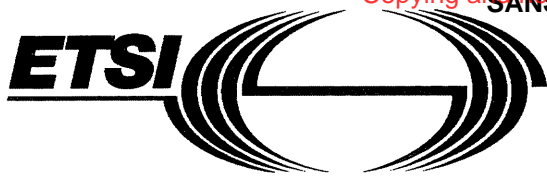

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 103

December 1990

Source: ETSI TC-SPS

Reference: T/S 46-40 [CD]

ICS: 33.080

Key words: ISDN, DTE, Terminal adaption

**Integrated Services Digital Network (ISDN);
Support of CCITT Recommendation X.21, X.21 bis and X.20 bis
based Data Terminal Equipments (DTEs) by an ISDN;
Synchronous and asynchronous terminal adaption functions**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - Internet: secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Contents

Foreword		7
Scope		9
1 Reference configurations		10
1.1 Customer access configuration		10
1.2 Network configuration		11
1.3 Interworking situation		12
2 Terminal adaption functions		13
2.1 Adaption function for DTEs conforming to X.1 user classes of service 3 to 6		13
2.1.1 Bit rate adaption functions		13
2.1.1.1 General approach		13
2.1.1.2 First step of rate adaption (RA1) of X.1 rates to the intermediate rates of 8/16 kbit/s		13
2.1.1.2.1 Frame structure		13
2.1.1.2.2 Frame synchronization		14
2.1.1.2.3 Status bits SP, SQ, SR		14
2.1.1.2.4 Additional signalling capacity (E bit)		15
2.1.1.2.5 Data bits		16
2.1.1.2.6 Repetition strategy		16
2.1.1.3 Second step of rate adaption (RA2)		19
2.1.1.4 Framing/reframing method and user rate identification		19
2.1.1.4.1 Search for frame alignment		19
2.1.1.4.2 Alignment monitoring/recovery		20
2.1.1.4.3 Identification of intermediate bit rate		20
2.1.2 X.21/X.21bis to D-channel protocol mapping		20
2.1.2.1 D-channel protocol to X.21 mapping (see figures 8 and 9)		21
2.1.2.1.1 SETUP (from terminal adaptor to the network)		21
2.1.2.1.2 SETUP ACKNOWLEDGE/CALL PROCEEDING (from network)		22
2.1.2.1.3 ALERTING (from network)		22
2.1.2.1.4 CONNECT (from network)		22
2.1.2.1.5 SETUP (from network)		22
2.1.2.1.6 CONNECT (from terminal adaptor)		23
2.1.2.1.7 CONNECT ACKNOWLEDGE (from network)		23
2.1.2.1.8 RELEASE (from network)		23
2.1.2.1.9 DISCONNECT (from terminal adaptor)		23
2.1.2.1.10 DISCONNECT (from network)		24
2.1.2.1.11 RELEASE COMPLETE (from network)		24
2.1.2.2 X.21bis (direct call), V.25 and V.25bis		24
2.1.3 Call offering procedure in a multiterminal configuration		24
2.1.4 Ready for data Alignment		30
2.1.5 Mapping of ETS 300 102-1 causes to X.21 call progress signals		32
2.1.6 Additional information for handling of exception situations		33
2.1.6.1 Call collision		33
2.1.6.1.1 Call collision at the X.21 interface		33
2.1.6.1.2 Call collision at the S/T reference point		33
2.1.6.2 No channel available		34
2.1.6.3 Premature clearing		34
2.1.6.4 No answer to outgoing SETUP		34

2.2	Adaption functions for DTEs conforming to X.1 user class service 7	34
2.2.1	Bit rate adaption functions	34
2.2.2	X.21/X.21bis to D-channel protocol mapping	35
2.2.3	Call offering procedure in a multiterminal configuration	35
2.2.4	Ready for data Alignment	35
2.2.5	Mapping of Q.931 causes to X.21 call progress signals.....	35
2.2.6	Additional information for handling of exceptional situations.....	35
2.3	Rate adaption functions for DTEs conforming to X.1 user class of service 19.....	35
2.3.1	Rate adaption functions	35
2.3.2	X.21/X.21bis to D-channel protocol mapping (see figures 8 and 9)	35
2.3.2.1	SETUP (from terminal adaptor)	35
2.3.2.2	SET-UP ACKNOWLEDGE/CALL PROCEEDING (from network)	36
2.3.2.3	ALERTING (from exchange).....	36
2.3.2.4	CONNECT (from network).....	36
2.3.2.5	SETUP (from network).....	36
2.3.2.6	CONNECT (from terminal adaptor)	37
2.3.2.7	CONNECT ACKNOWLEDGE (from network)	37
2.3.2.8	RELEASE (from network) (multipoint configuration).....	37
2.3.2.9	DISCONNECT (from terminal adaptor)	37
2.3.2.10	DISCONNECT (from network).....	37
2.3.2.11	RELEASE COMPLETE (from network)	38
2.3.3	Call offering procedure in a multiterminal configuration	38
2.3.4	Ready for data Alignment	38
2.3.4.1	Entering the data transfer phase.....	38
2.3.4.2	Leaving the data transfer phase	39
2.3.5	Mapping of Q.931 causes to X.21 call progress signals.....	40
2.3.6	Additional information for handling of exception situations.....	40
2.4	Adaption function for DTEs conforming to X.1 user classes of service 1 and 2 or other asynchronous user bit rates	41
2.4.1	Rate adaption functions	41
2.4.1.1	General approach	41
2.4.1.2	Supported asynchronous user rates	42
2.4.1.3	Asynchronous-to-synchronous conversion (RAO).....	42
2.4.1.4	Adaption to the B-channel rate.....	43
2.4.1.5	Break signal	43
2.4.1.6	Overspeed/underspeed	43
2.4.1.7	Parity bits	43
2.4.2	Flow control	43
3	Test loops	43
Annex A (normative):	Interchange circuits used in this specification.....	44
1	Essential and optional interchange circuits.....	44
2	Timing arrangement	44
3	Circuit 106.....	44
4	Circuit 109.....	44
5	Electrical/mechanical characteristics of interchange circuits.....	46
5.1	Basic ISDN user/network interface	46
5.2	TE2/TA (DTE/DCE) interface	46
5.2.1	Rates less than or equal to 19.2 kbit/s.....	46
5.2.2	Rates greater than 19.2 kbit/s.....	46
6	Fault Conditions on interchange circuits.....	46